

WAT-06U2D

1/2.8 小型防滴 USB2.0 全高清彩色攝像機


NEW



■特徵

- 與傳統產品相比，分辨率提高1.3倍，靈敏度提高3.5倍。
- USB視頻類兼容。
- 全高清可輸出30fps。
- 可連接智能手機或平板電腦，可通過Wi-Fi或4G/3G傳輸實現視頻。
- 防水設計，可在戶外使用（相當於IPX7）。

■外型尺寸圖

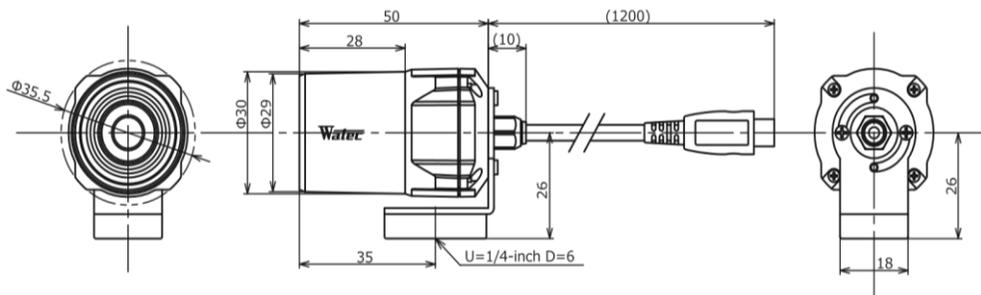


規格



攝像素子：	1/2.8型 inch BSI CMOS image sensor	
總畫素：	1945(H) x 1097(V)	
Unit cellsize：	2.9µm(H) × 2.9µm(V)	
攝像方式：	RGB primary color bayer arrangement mosaic filter on chip	
同步方式：	內同步	
掃描方式：	Progressive	
輸出形式：	1920x1080, 1280x720, 640x480, 320x240	
最大速率：	30 fps	
視頻壓縮：	Mjpg, YUY2	
視頻輸出：	USB Video Class (Compatible)	
水平解析度：	More than 900TVL (Center)	
最低照度：	0.3 lx. F2.0 (AGC ON=36dB, 快門=關) 0.07 lx. F2.0 (AGC ON=36dB, 快門=1/7.5 sec.)	
信號雜訊比(S/N)：	-	
功能設置：	cameras viewer	
AE 模式：	Fixed	1/15, 1/7.5, 1/4 sec. 1/30, 1/60, 1/120, 1/250, 1/500, 1/1000, 1/2000, 1/4000, 1/8000 sec.
	EI	1/30 - 1/8000 sec. 1/7.5 - 1/8000 sec.
白平衡：	ATW, MWB	
AGC：	ON	0 - 36dB
	OFF	-
MGC：	0 - 72dB (1dB step)	
Gamma 特性：	γ=USER (Level adjustable)	
Noise reduction 降噪：	-	
寬動態範圍：	-	
鏡頭光圈：	-	
逆光補償：	BLC	
白點校正功能：	-	
清晰度：	Level可調整	
Defog：	-	
Digital zoom：	x1, x1.38, x2.25 *1	x1, x1.2, x1.5 *2
隱私遮蔽：	-	
鏡像倒像：	-	
Freeze：	-	
Motion Detection：	-	
Neg. Inage：	-	
Interface：	USB (High speed)	
電源電壓：	USB +5V	
消耗電流：	0.65W (130mA)	
動作溫度：	-10 - +50°C	
保存溫度：	-30 - +70°C	
動作/保存溫度：	95% RH 以下	
標準鏡頭：	M3620BC-12 (f3.6 F2.0)	
電纜長度：	1.2m (Max.3.0m)	
重量：	約85g	
配件：	-	
推薦的系統規格	CPU	Intel® Core TM i Series
	RAM	RAM 2GB or larer
	Others	Others USB2.0 Port, 1920x1080 or better resolution display
操作確認作業系統	Windows 10 32bit/64bit, Android 4.0 or newer	

*1:Output format: 640x480 *2:Output format: 1280x720


Options

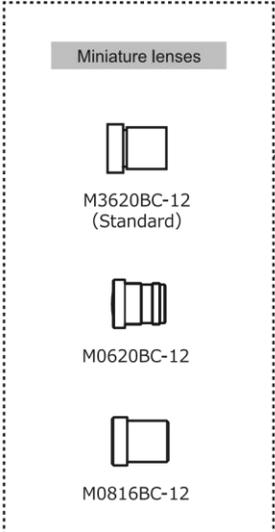


WAT-06U2D

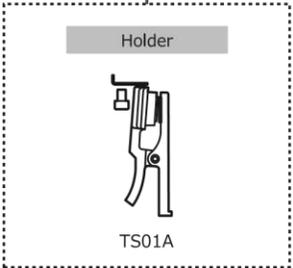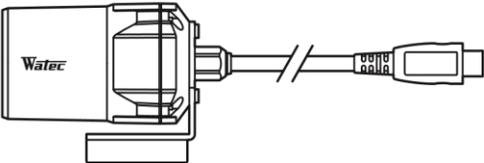

Smartphone / Tablet




* Application download required (Charge-free)



3G/4G

Wi-Fi



*Supporting various transmission system (Please contact us for the details)

*WAT-06U2D with optional lenses are made to order.